



Tested 30mm Slim Series Range


The 30mm slim series is tested as per ASTM and AAMA standards considering 3.75KPa* structural Load, specially designed for high rise apartments.


The exquisitely designed windows add a touch of panache to any space, instantly elevating its look and feel. The multi-point locking systems ensure safety and water-proofing. Their great functionality, durability and easy installation make these windows super user-friendly and feasible



Note: Actual image of tested product

30MM Slim Sliding Series

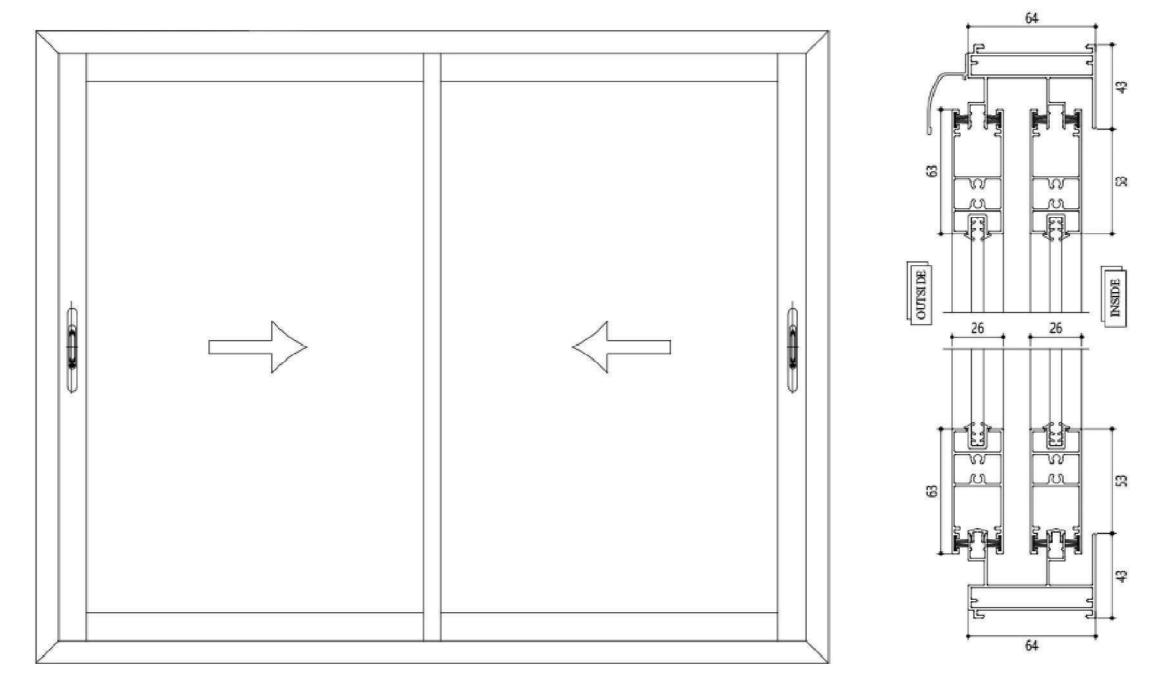

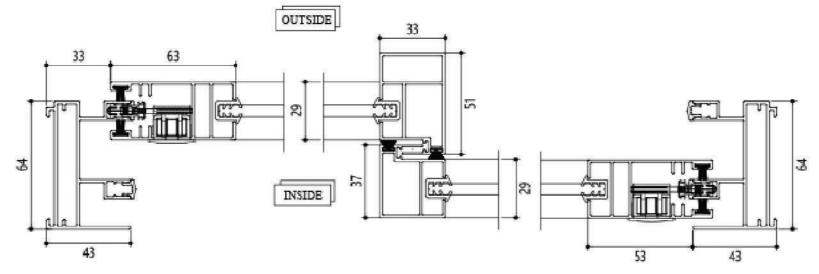



Technical Specification

- Maximum Shutter Dimensions 1000mmx2200mm ٠
- Available in 2track and 3 track ٠
- Single Glass options 5mm, 6mm and 8mm ٠
- Combination Frame option available
- All Hardware European brand ٠
- Specially designed for High rise and Affordable segment
- Multi-point locking available



30MM SLIDING TRACK CAP SYSTEM					
SR NO.	PROFILES DRAWING	SECTION CODE	DESCRIPTION	WEIGHT KG/M	PERIMETER
1.	64.45 64.45 64.45 64.45	3039	2 TRACK OUTER FRAME	1.190	0.417
2.		3040	3 TRACK OUTER FRAME	1.767	0.588
3.		3031	TOP / BOTTOM SHUTTER	0.871	0.329
4.	62.9	3034	HANDLE SHUTTER	0.988	0.379
5.	33	3033	SLIM NON KPA INTERLOCK	0.661	0.230
6.	33	3032	KPA INTERLOCK	0.925	0.259
7.	9.6 TT 2:	3048	GUIDE RAIL	0.074	0.040
8.		3076	MEETING SECTION	0.229	0.132
9.	40 40 103.9	3046	TOP OUTER FRAME 3 TRACK	1.132	0.340
10.	40 6 103.9	3047	BOTTOM OUTER FRAME 3 TRACK	1.200	0.326
11.	40 64.5	3045	TOP OUTER FRAME 2 TRACK	0.816	0.261
12.	40 64.5	3044	BOTTOM OUTER FRAME 2 TRACK	0.771	0.247



ADDRESS:

X- Point Building, Shop No 3, Plot No 379, S.V. Road, Near Shatabdi Hospital, Opp. Astha Hospital, Kandivali (West), Mumbai - 400067







maharashtra_aluminium_centre